

6-EVF-45.3



Applications

- > Electric vehicle
- > Electric wheelchair
- > Electric scooter
- > Electric play car for children
- > Garbage truck
- > Patrol car

General Features


- > High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- > High Energy Density and Power Density
- > Excellent Charge Acceptance Ability
- > Strong High and Low Temperature Performance
- > Optimized Capability of instant High-current Discharging
- > Low self-discharge rate

Specification

Nominal Voltage	12V
Nominal Capacity	45.3Ah
Design life	5 years
Terminal	M6
Approx. Weight	Approx 12.6kg (27.85lbs)
Container Material	ABS
	48.0Ah 10Hour Rate (4.80A to 10.5V)
	45.3Ah 3Hour Rate (15.1A to 10.5V)
	39.0Ah 1Hour Rate (39.0A to 10.5V)
	Discharge: -20 ~50°C (-4 ~ 122°F)
Operating Temperature	Charge: -20 ~50°C (-4 ~ 122°F)
	Storage: -20 ~50°C (-4 ~ 122°F)
	Float Use: 13.7-13.9V@25°C
Charge Method (25 °C)	Cycle Use :14.7-14.9V,@25°C
	Max charge current 9.0A
	Self discharge



Dimension: 223(L)×121(W)×175(H)×175(TH) Unit: mm

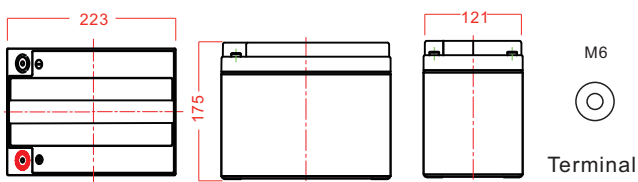

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


F.V/Time	5Min	15Min	30Min	1h	2h	3h	5h	8h	10h	20h
1.60V	206.8	122.1	70.0	40.1	22.1	15.6	9.48	6.01	4.95	2.85
1.65V	201.4	118.3	68.8	39.9	22.0	15.5	9.39	5.97	4.89	2.83
1.70V	193.8	115.6	67.7	39.5	21.8	15.3	9.29	5.91	4.85	2.82
1.75V	177.6	112.0	67.0	39.0	21.5	15.1	9.20	5.86	4.80	2.80
1.80V	159.2	104.1	64.1	38.0	21.1	15.0	9.00	5.83	4.75	2.79
1.85V	141.9	93.4	58.5	35.2	20.0	14.1	8.50	5.58	4.61	2.74

Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)


F.V/Time	5Min	15Min	30Min	1h	2h	3h	5h	8h	10h	20h
1.60V	347.6	215.7	126.4	75.8	41.8	29.8	18.03	11.75	9.55	5.63
1.65V	334.6	211.0	126.4	75.2	41.7	29.4	17.94	11.56	9.45	5.61
1.70V	333.5	208.6	126.4	74.6	41.5	29.19	17.75	11.56	9.27	5.58
1.75V	310.8	207.4	125.3	74.1	41.3	28.09	17.66	11.47	9.27	5.55
1.80V	284.8	195.6	121.9	73.5	43.2	27.89	17.47	11.38	9.09	5.52
1.85V	254.5	175.4	111.9	68.2	39.4	27.58	16.63	10.92	8.95	5.48

6-EVF-45.3


Discharge characteristic

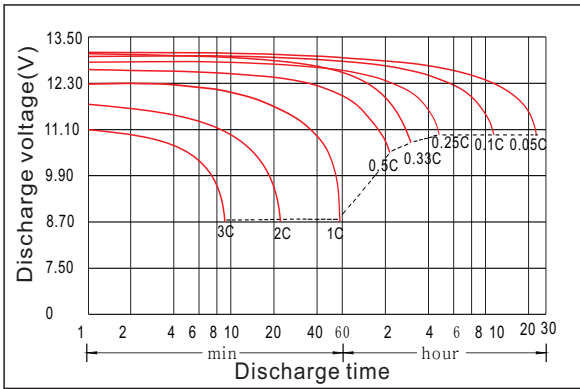


Charging characteristic

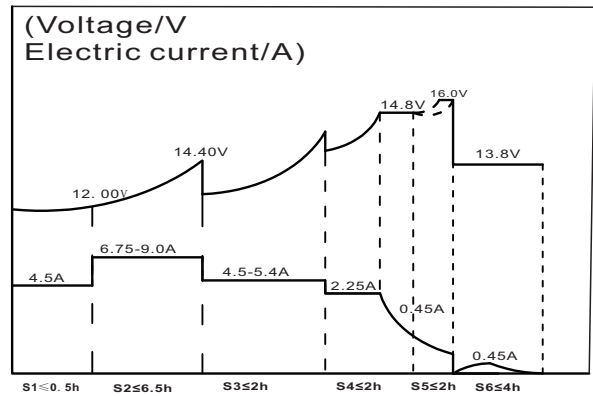


The effect of temperature on capacity

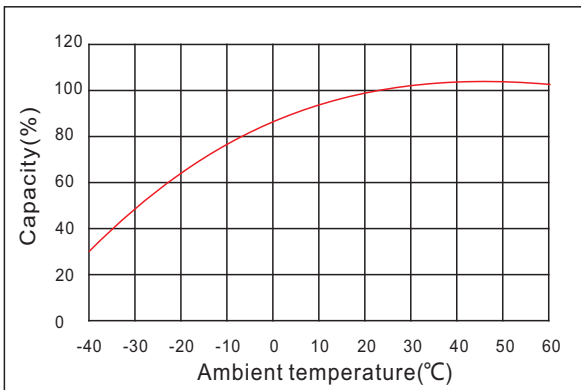


The effect of discharge depth on cycle life

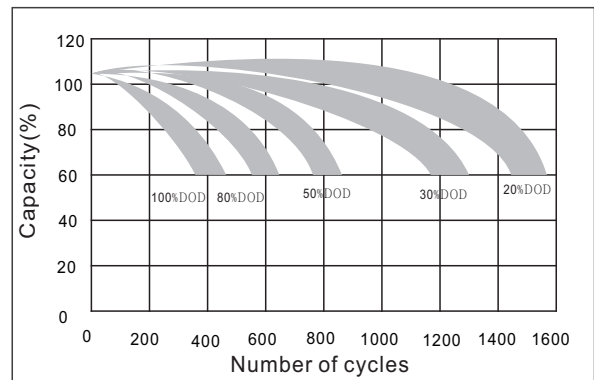

Curves of self-discharge

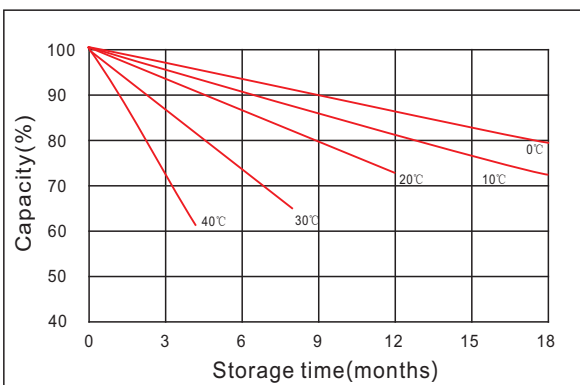

Curves of open circuit voltage vs. capacity

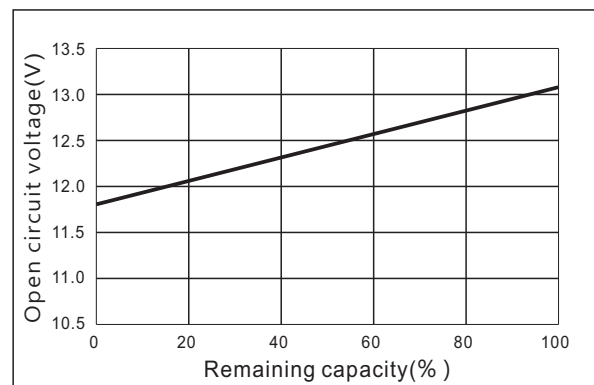

www.kijo.com.cn info@kijo.com.cn

+86-791-85982779 +86-791-85989842

Jiangxi Jingjiu Power Science&Technology Co. Ltd.
Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

Jiangxi Jingjiu Power (Jiujiang) Co. Ltd.
Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, jiujiang City, Jiangxi Province, China.

